RIDERS STAR GROUP LTD.

COMPANY PROFILE

We help businesses find and set up the best machines for their work. We have a lot of experience in this area and we only sell high-quality equipment. We also offer training to help your team use the machines properly.

Our goal is to make your business more efficient and successful.

MORE INFO

www.ridersgroupbd.com

CONTACT US

+880 1989 699 314 info@ridersgroupbd.com





Riders Star Group Ltd.

ABOUT US

Riders Star Group Ltd. is your premier destination for sourcing, importing, and installing top-quality business machinery. With over **9 years** of experience in the industry, we've established ourselves as a trusted partner for businesses seeking reliable and efficient equipment.

Our commitment to excellence is reflected in every aspect of our services. From the moment you choose a machine to its installation and ongoing support, we're dedicated to ensuring your complete satisfaction. We offer a wide range of products, each backed by a **guarantee** of quality and performance.

Our team of experts is always available to provide **comprehensive training** on your new equipment, empowering your staff to maximize its potential.

Led by **Md. Towhidur Rahman**, CEO, Riders Star Group Ltd. is committed to delivering exceptional value and service to our customers.





DF-全自动拉伸盒(膜) 真空包装机

DF-Full-automatic stretch box (film) vacuum packaging machine

产品介绍Product Description

自动拉伸膜真空包装机是利用可拉伸和热塑的薄膜或片材作为原材料来制造容器,在装填充物料后再以薄膜或片材覆盖进行抽真空和气调密封的包装设备。适用于食品,小商品等产品的包装,如肉制品,水产品,糕点,面点,各类熟食等包装。无需事先定制包装盒,集薄膜拉伸成型,装填物料,抽真空和气调,热封,分切等功能于一体,具有方便,能耗低,周期短,效益高等特点。

The automatic stretchable film vacuum packaging machine uses the stretchable and thermoplastic film or sheet as the raw material to manufacture the container, and then covers it with film or sheet after filling the materialPackaging equipment for air and controlled atmosphere sealing. It is applicable to the packaging of food, small commodities and other products, such as meat products, aquatic products, cakes, pastries, all kinds of cooked food and other packaging. No need to customize the package in advanceBoxing, which integrates the functions of film stretching forming, filling materials, vacuuming and air conditioning, heat sealing, slitting, etc., has the characteristics of convenience, low energy consumption, short cycle, high efficiency, etc.



主要技术参数/Main Technical Standards:

型 号	Model	DFLS-520	DFLS-420	DFLS-320
上膜宽度	Upper film width	492mm	392mm	292mm
下膜宽度	Lower membrane width	522mm	422mm	322mm
真空度	Vacuum degree	≤20 <mark>0</mark> pa	≤200pa	≤100-200pa
空气压缩	Air compression	≥0.6mpa		
电源	Power Supply	380V50HZ/18KW	380V50HZ/16KW	380V50HZ/14KW
冷却水	Cooling water	1.5-3bar		
包装尺寸	Package size	490mm*490mm	390mm*390mm	290mm*290mm
包装速度	Packaging speed	3-6循环/分钟		
最大膜卷直径	Maximum roll diameter	300mm		
成型拉伸深度	Forming drawing depth	≤100mm(可按用户要求设计)		
重量	weight	2050kg	1800kg	1580kg
外形尺寸	Overall dimension	6500mm*1180mm*1850mm	6000mm*1080mm*1850mm	5400mm*695mm*1850mm
			(盒子大小不同尺寸可能会	有变, 重量也会跟着变, 具体以实物为准)



DF-730A连续式气调包装机

DF-730A Continuous modified atmosphere packaging machine

产品介绍Product Description

此款设备采用不锈钢结合铝合金制造,适用于盒装/碗装/铝箔盒装食品包装封口/真空气调包装封口,气体置换率98-99%左右,可自动进盒/出盒/。设备采用知名品牌PLC/触摸屏控制,驱动系统为品牌私服电机驱动,气动部件采用台湾或日本品牌,电器采用施耐德/西门子等品牌,支持客户非标定制。此款产品特点为真空度高/置换率高,效率高,故障低,内置式自动监测系统,可实时监测各部件运行动态。

The equipment is made of stainless steel and aluminum alloy ,suitable for box,bowl, aluminum foil packaging food packaging seal vacuum air conditioning packaging seal gas Replacement Rate about98-99% Automatic,box in, Out of the box, The equipment uses the well-known brand PLC Touch screen control, The drive system is driven by brand servo motor, The pneumatic components are made in Taiwan or Japan, The electric appliance uses Schneider/siemens, etc. ,brand,Support Customer non-standard customization. This product is characterized by high vacuum/high replacement rate, high efficiency, low failure,Built-in automatic monitoring system, real-time monitoring of the operation of various components



主要技术参数/Main Technical Standards:

型	号	Model	DF-730-A(定制款)
电	源	Power Supply	380V/50-60HZ
产	量	Yield	1200-1500盒/小时
重	量	Weight	约1000KG
功	能	Function	封口/气调 自动进盒/出盒
尺	寸	size	3500x1300x1700MM

(盒子大小不同尺寸可能会有变,重量也会跟着变,具体以实物为准)


DF-760连续真空气调包装机

DF-760 continuous vacuum modified atmosphere packaging machine

产品介绍Product Description

760型连续式全自动真空气调包装机,采用触摸屏设置,内置故障检测,整机采用不锈钢材料焊接而成,模具采用铝合金材质,施耐德品牌电器,可真空气调封口,氧气/氮气/二氧化碳混合/置换率99%,选配德国WETT,美国膜康混配器整机质保一年,适用于各类食品的保鲜塑封包装。

Model 760 continuous full—automatic vacuum modified atmosphere packaging machine uses touch screen to set built—in fault detection, the whole machine is made of stainless steel materials welded, the mold is made of aluminum alloy, Schneider brand electrical appliances, can be sealed with real air conditioning, the oxygen/nitrogen and carbon dioxide mixing/replacement rate is 99%, Germany WETT is selected, and the United States film and health mixer has a one—year warranty, which is applicable to the fresh–keeping plastic packaging of all kinds of food.

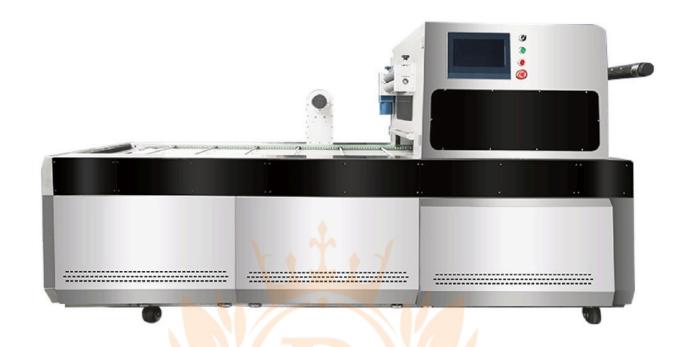

主要技术参数/Main Technical Standards:

型 号	Model	760
材质	Texture Of Material	不锈钢机架304
输出	Output	充气800盒/ <mark>小时</mark> 封口1400盒/小时
模具尺寸	Die Size	20*14 18*12 14*14(可定制)
温度	Temperature	0-300℃(内置集成温控)
尺寸	Size	3000*800*1550MM
重 量	Weight	500-700KG(预估)
功能	Function	真空充氮气/二氧化碳/氧气

(盒子大小不同尺寸可能会有变,重量也会跟着变,具体以实物为准



DF-95型灌装封口机(定制)

DF - 95 filling and sealing machine (customized)

产品介绍Product Description

本机采用304不锈钢制造,该机适用于各种形状的塑料盒,塑料杯,塑料碗等容器的液体饮料灌装、封口、切边、自动控温、废料吸卷、日期打印、紫外线消毒一次完成的全自动封口机,广泛应用于腌制食品、熟食、饮料、酿造、医药等领域。我们可以根据客户的不同需求制造机器。

This machine adopts 304 stainless steel, plastic box, the machine is suitable for various shapes of plastic cups, plastic bowls, filling liquid beverage containers such as sealing, cutting, automatic temperature control, automatic sealing machine waste suction roll, printing date, ultraviolet disinfection once completed, widely used in pickled food, cooked food, beverage brewing, medicine and other fields. We can make machines according to the different needs of customers.



主要技术参数/Main Technical Standards:

型 号	Model	DF-95
生产能力	Throughput	800-1600盒/小时
充填容量	Filling capacity	20-500ml
整机功率	Power	4.5KW
耗气量	Gas consumption	0.65m ³ /min
使用电源	Use power	380V/50HZ
温控范围	Temperature range	0–300℃
重量	Weight	850kg
外型尺寸	Exterior dimension	3700x800x1700mm

(盒子大小不同尺寸可能会有变,重量也会跟着变,具体以实物为准)

DF-F2自动片膜封口机

DF-F2 Automatic film sealing machine

产品介绍Product Description

本机采用304不锈钢制造,该机适用于各种形状的塑料盒,塑料杯,塑料碗等容器的液体饮料灌装、封口、切边、自动控温、废料吸卷、日期打印、紫外线消毒一次完成的全自动封口机,广泛应用于腌制食品、熟食、饮料、酿造、医药等领域。我们可以根据客户的不同需求制造机器。

This machine adopts 304 stainless steel, plastic box, the machine is suitable for various shapes of plastic cups, plastic bowls, filling liquid beverage containers such as sealing, cutting, automatic temperature control, automatic sealing machine waste suction roll, printing date, ultraviolet disinfection once completed, widely used in pickled food, cooked food, beverage brewing, medicine and other fields. We can make machines according to the different needs of customers.



主要技术参数/Ma<mark>in Tec</mark>hnical Standa<mark>rds</mark>:

型 号	Model	DF-F2
生产能力	Throughput	800-1600盒/小时
充填容量	Filling capacity	20-500ml
整机功率	Power	4.5KW
耗气量	Gas consumption	0.65m ³ /min
使用电源	Use power	380V/50HZ
温控范围	Temperature range	0–300℃
重 量	Weight	850kg
外型尺寸	Exterior dimension	2200x600x1450mm

(盒子大小不同尺寸可能会有变,重量也会跟着变,具体以实物为准)



PM-350自动放膜封口机

PM-350 automatic film release and sealing machine

产品介绍Product Description

本产品采用PLC控制,可调节各项数据,适用于铝盒片膜自动封口,产品结构简单,可自动顶盒,自动吸膜放置在封口位置,封口时 间可调,速度可调,气缸采用台湾亚德客气缸,电器采用施耐德电器,内置自动监测系统,可实时监测各部件运行工况。封口效果好,稳定 系数高,可定制大小口径。

This product is controlled by PLC and can adjust various data. It is suitable for automatic sealing of aluminum box film. The structure of the product is simple. It can automatically top the box and place the automatic suction film in the sealing position. The sealing time and speed are adjustable. The cylinder is made of Taiwan adek cylinder and the electric appliance is Schneider electric appliance. The built-in automatic monitoring system can monitor the operating conditions of various parts in real time. The sealing effect is good, the stability coefficient is high, and the caliber can be customized.



主要技术参数/Main Technical Standards:

型 号	Model	PM-350	
电 源	Power Supply	220V/50-60HZ	
产量	Yield	4-5次/分钟	
重量	Weight	约100KG	
驱动方式	Driving mode	气动	
功率	Power	3.5KW	
气源压力	Air pressure	0.6-0.8MPA	
功能	Function	自动放膜/自动封口/自动顶盒	
尺寸	Size	1100*1400*800MM	
	/4	スナナスロロナマがくたさ チョル ヘロギカ ヨケッカ	14-1-44



DF-95-2连续式一出四封口机

DF-95-2 Four-seal technique in a row

产品介绍Product Description

电器采用施耐德/西门子等品牌,支持客户非标定制。此款产品特点为封口效率高,故障低,内置式自动监测系统,可实时监测各

The equipment is made of stainless steel and aluminum alloy It is suitable for sealing food packaging such as box, Cup, bowl and aluminum box Can automatically put box, quantitative filling, add liquid or paste, can code The equipment uses the well-known brand PLC Touch screen control The drive system is controlled by a Servo or decelerating CAM box Autonomous and controllable The pneumatic components are made in Taiwan or Japan Brand names such as Schneider/siemens are used in electric appliances. Support Customer non-standard customization This product features high sealing efficiency, low failure Built-in automatic monitoring system Real-time monitoring of the operation of the components.



主要技术参数/Main Technical Standards:

型	号	Model	DF-95-2(定制款)
电	源	Power Supply	380V/50-60HZ
产	量	Yield	2400-2800盒/小时(可调)
重	量	Weight	约1300-1500KG
功	能	Function	自动进盒/打码/封口/出盒
尺	寸	size	4000x1200x1700MM

(盒子大小不同尺寸可能会有变,重量也会跟着变,具体以实物为准)

DF-580B真空贴体包装机

DF-580B vacuum body-fitting packaging machine

产品介绍Product Descripton

此款设备采用不锈钢结合铝合金制造,适用于盒装等食品包装/真空贴体包装,设备采用知名品牌PLC/触摸屏控制, 气动部件采 用台湾或日本品牌, 电器采用施耐德/西门子等品牌, 支持客户非标定制。此款产品特点为真空度高, 封口效果好, 真空系统采用63 -100立方真空泵,贴体效果好,立体感强。

This equipment is made of stainless steel combined with aluminum alloy, suitable for boxed food packaging / vacuum body fitted packaging. The equipment is controlled by PLC / touch screen of well-known brand, pneumatic parts are made of Taiwan or Japan brand, and electrical appliances are made of Schneider / Siemens brand, which supports customer's non calibration system. This product is characterized by high vacuum degree and good sealing effect. The vacuum system adopts 63-100 cubic vacuum pump, with good body fitting effect and strong three-dimensional sense.



主要技术参数/Main Technical Standards:

型	号 Mo	del DF	-580-A
电	源 Power	Supply 220V/3	80/50-60HZ
产	量Yie	eld 3-	4次/分钟
重	量 Wei	ght 约	1500KG
真 空	泵 Vacuun	n pump 63	3-100m ³
功	能 Fund	tion 真空	医贴体封口
尺	寸 siz	e 850x10	000x1700MM

(盒子大小不同尺寸可能会有变,重量也会跟着变,具体以实物为准)

RIDERS Star Group Ltd. SOURCING, IMPORT, INSTALLATION.

DF-L型封切+收缩膜包装机(可定制)

DF-L type sealing and cutting+shrink film packaging machine (customizable)

产品介绍Product Description

DF-4050L型封切机,结合先进的封切收边技术,并经过改良而独特设计制造,整机质保一年,适用于印刷、彩盒、贺卡、相册、相框、医 药、日化等产品的外观包装。

DF-4050L sealing and cutting machine, combined with advanced sealing, cutting and edge-closing technology, is designed and manufactured with an improved and unique design. The whole machine has a one-year warranty. It is applicable to the appearance packaging of printing, color box, greeting card, album, photo frame, medicine, daily chemical and other products.



主要技术参数/Main Technical Standards:

....

型 号	Model	DF-4050	
电 源	Power Supply	220V/50HZ	
输送带水平高度	Horizontal Height Of Conveyor Belt	770 ± 50mm	
封切包装尺寸	Sealing And Cutting Package Size	L500*W400*H120MM	
包装速度	Packaging Speed	20-60件/min	
功率	Power	1.6KW	
温度	Temperature	0–250℃	
外观尺寸	Appearance Dimension	L1643*W800*H1430MM	

(盒子大小不同尺寸可能会有变,重量也会跟着变,具体以实物为准)





型 号	Model	DFS-4522	
电 源	Power Supply	380V50/60Hz 220V50/60Hz	
输送带水平高度	Horizontal Height Of Conveyor Belt	780 ± 50mm	
炉道尺寸	Furnace Channel Size	L1500XW450XH220mm	
包装速度	Packaging Speed	20-60件/min	
包装尺寸	Package Size	L50-1000XW50-420XH0-200mm	
功率	Power	13kw	
温度	Temperature	0–250℃	
外型尺寸	Overall Dimension	L1908XW702XH1360mm	
	(盒子大小不同尺寸可能会	有变,重量也会跟着变,具体以实物为	准



DF-460真空气调包装机

DF-460 vacuum modified atmosphere packaging machine

产品介绍Product Description

本机器适用于塑料杯、塑料盒等各种不同容器的封口。广泛地适用于各种产品。该机全部采用不锈钢制造,结构简单,能很好地完成抽真空,充气,封口、切边的操作我们可以根据客户的不同需求制造手压式,半自动和全自动等机器。

Suitable for sealing plastic cup, plastic tray and all kinds of different containers. Widely used in various producThe machine is made of stainless steel with simple construction and easy to sealing and cutting. it can vacuumflushing gas to keep food fresh We can make the machine according to customer's different requirements Such as manual sealing machine, semi–automatic sealing machine and automatic sealing machine



主要技术参数/Main Technical Standards:

型 号	Model	DF-460(定制款)
生产能力	Throughput	400-600盒/小时(可调)
极限真空度	Limit vacuum	0.5-0.7MPA
整机功率	Power	ЗKW
耗气量	Gas consumption	0.45 m ³ /min
使用电源	Use power	220V/380V/50-60HZ
温控范围	Temperature range	0–300℃
重 量	Weight	约400KG
外型尺寸	Exterior dimension	1000x1200x1600MM
功能	Function	自动充氮/封口/出盒

(盒子大小不同尺寸可能会有变,重量也会跟着变,具体以实物为准)



DF-580真空气调包装机

DF-580 vacuum modified atmosphere packaging machine

产品介绍Product Description

580型气动,全自动真空气调包装机,采用触摸屏设置,内置故障检测,整机采用不锈钢材料焊接而成,模具采用铝合金材质,施耐德品牌电器,可真空充氮封口,品牌电机,整机质保一年,适用于各类食品的气调保鲜塑封包装。混配系统采用,德国WETT,美国MOCON,高端品牌置换率高。

580 type pneumatic, fully automatic vacuum modified atmosphere packaging machine, with touch screen setting, built-in fault detection, the whole machine is made of stainless steel materials welded, the mold is made of aluminum alloy, Schneider brand electrical appliances, vacuum nitrogen filling sealing, brand motor, the whole machine has a one-year warranty, and is applicable to the modified atmosphere fresh-keeping plastic packaging of all kinds of food. The mixing system adopts WETT in Germany and MOCON in the United States, The replacement rate of high-end brands is high.



主要技术参数/Main Technical Standards:

型 -	를	Model	580
材		Texture Of Material	不锈钢机架(304)
输	Н	Output	真空气调600-800盒/小时
模具尺*	t	Die Size	20*14 22*13 26*17等(可定制)
温	度	Temperature	0−300℃
尺	t	Size	1200*1200*1700MM
重	k	Weight	200-250KG
功 前	r E	Function	真空 充气 (02, CO2, N2)封口

(盒子大小不同尺寸可能会有变,重量也会跟着变,具体以实物为准)





20QL-F air-flow sealing machine

产品介绍Product Description

20QL气流式(充氮气保鲜)封口机,整机采用不锈钢材质,集成式PLC,触摸屏控制界面,模具采用加厚氧化铝合金材质,电动封口,自动 电加热,自动恒温,自动卷膜对标,独立温控,自动计数,氮气置换率99%,适用于各类餐饮,食品,外卖等密封包装。

20QL air-flow (nitrogen filled) sealing machine, the whole machine adopts stainless steel integrated PLC, touch screen control interface, the mold adopts thickened aluminum alloy electric sealing, automatic Electric heating, automatic constant temperature, automatic film rolling benchmarking, independent temperature control, automatic counting, nitrogen replacement rate of 99%, applicable to all kinds of catering, food, takeaway and other sealed packaging.



主要技术参数/Main Technical Standards:

型 号	Model	20QL-F
材质	Texture Of Material	304不锈钢
输出	Output	350-400/小时
模具尺寸	Die Size	250/180MM
温度	Temperature	0–300℃
尺 寸	Size	620*320*695MM
重 量	Weight	70KG
功能	Function	热封, 充氮气

(盒子大小不同尺寸可能会有变,重量也会跟着变,具体以实物为准)



20PM-E片膜封口机

20PM-E film sealing machine

产品介绍Product Description

本机采用电动机作为动力源,包装材料为金色铝箔盒、铝箔膜、通过电加热方式、把片膜热压黏和在铝箔盒上面、达到密封的作用、 此款包装的特点是美观,环保、密封效果好、可高温灭菌、可明火加热、适用于各类食品包装。

This machine uses the motor as the power source, and the packaging material is the golden aluminum foil box, aluminum foil film. Through the electric heating method, the film is hot-pressed and glued on the aluminum foil box to achieve the function of sealing, This package is characterized by beauty, environmental protection, good sealing effect, high temperature sterilization, open fire heating, and is applicable to all kinds of food packaging.



主要技术参数/Main Technical Standards:

型 号	Model	20PM-E
材质	Texture Of Material	304不锈钢
输 出	Output	350-500/小时
模具尺寸	Die Size	250/180MM
温度	Temperature	0–240℃
尺寸	Size	380*620*555MM
重 量	Weight	70KG
功能	Function	热封

DF-封箱机系列(可定制)

DF - sealing machine series (customizable)

产品介绍Product Description

胶带封箱机具有广泛的用途,适用于家用电器、纺织、食品、日用百货、药品、轻工、化工等各种行业产品纸箱的封箱包装,即可单机作业,也可与流水线配套使用。封箱机采用即贴胶带对纸箱封口,经济快速、操作容易、保养简单,随意调校不同大小的纸箱箱平整、规范、美观同时完成上、下封箱动作。采用印字胶带更可提高产品的形象。

The tape sealing machine has a wide range of applications. It is applicable to the sealing and packaging of cartons for household appliances, textiles, food, daily necessities, pharmaceuticals, light industry, chemical and other industries. It can be used alone or in conjunction with the assembly line. The carton sealing machine uses instant adhesive tape to seal the cartons, which is economical, fast, easy to operate, and easy to maintain. The cartons of different sizes can be adjusted at will. The cartons are flat, standard, and beautiful, and the upper and lower cartons can be sealed at the same time. The use of printing tape can improve the image of the product.



主要技术参数/Main Technical Standards:

封箱机型号	Sealing Machine Model	DF-4030型
封箱尺寸(长)	Box Size (length)	不限
封箱尺寸(宽)	Box Size (width)	80-290MM
封箱尺寸(高)	Box Size (height)	90-380MM
外包装尺寸	Outer Package Size	930*705*870MM
适用纸箱	Carton Size	3-9号纸箱
电压/功率	Voltage/power	220V/50-60HZ 240W
驱动方式	Drive Mode	左右驱动
效率	Efficiency	15-20次/分

(盒子大小不同尺寸可能会有变,重量也会跟着变,具体以实物为准)



封箱机型号	Sealing Machine Model	DF-4030FJH型
封箱尺寸(长)	Box Size (length)	不限
封箱尺寸(宽)	Box Size (width)	100- <mark>500MM</mark>
封箱尺寸(高)	Box Size (height)	40-380MM
外包装尺寸	Outer Package Size	930*705*870MM
适用纸箱	Carton Size	专为13号纸箱设计
电压/功率	Voltage/power	220V/50-60HZ 200W
驱动方式	Drive Mode	左右驱动
效率	Efficiency	15-20次/分

(盒子大小不同尺寸可能会有变,重量也会跟着变,具体以实物为准)





封箱机型号 Sealing Machine Model DF-2020型 封箱尺寸(长) Box Size (length) 不限 封箱尺寸(宽) Box Size (width) 80-180MM 封箱尺寸(高) Box Size (height) 90-220MM 外包装尺寸 Outer Package Size 1030*550*760MM 适用纸箱 Carton Size 7-12号纸箱 电压/功率 Voltage/Power 220V/50-60HZ 200W 驱动方式 Drive Mode 左右驱动 放率 Efficiency 15-20次/分 (盒子大小不同尺寸可能会有变,重量也会跟着变,具体以实物为准			
封箱尺寸宽) Box Size (width) 80-180MM 封箱尺寸(高) Box Size (height) 90-220MM 外包装尺寸 Outer Package Size 1030*550*760MM 适用纸箱 Carton Size 7-12号纸箱 电压/功率 Voltage/Power 220V/50-60HZ 200W 驱动方式 Drive Mode 左右驱动 效率 Efficiency 15-20次/分	封箱机型号	Sealing Machine Model	DF-2020型
封箱尺寸高) Box Size (height) 90-220MM 外包装尺寸 Outer Package Size 1030*550*760MM 适用纸箱 Carton Size 7-12号纸箱 电压/功率 Voltage/Power 220V/50-60HZ 200W 驱动方式 Drive Mode 左右驱动 效率 Efficiency 15-20次/分	封箱尺寸(长)	Box Size (length)	不限
外包装尺寸 Outer Package Size 1030*550*760MM 适用纸箱 Carton Size 7-12号纸箱 电压/功率 Voltage/Power 220V/50-60HZ 200W 驱动方式 Drive Mode 左右驱动 效率 Efficiency 15-20次/分	封箱尺寸(宽)	Box Size (width)	80-180MM
适用纸箱 Carton Size 7-12号纸箱 电压/功率 Voltage/Power 220V/50-60HZ 200W 驱动方式 Drive Mode 左右驱动 效率 Efficiency 15-20次/分	封箱尺寸(高)	Box Size (height)	90-220MM
电压/功率 Voltage/Power 220V/50-60HZ 200W 驱动方式 Drive Mode 左右驱动 效率 Efficiency 15-20次/分	外包装尺寸	Outer Package Size	1030*550*760MM
驱动方式 Drive Mode 左右驱动 效率 Efficiency 15-20次/分	适用纸箱	Carton Size	7-12号纸箱
效率 Efficiency 15-20次/分	电压/功率	Voltage/Power	220V/50-60HZ 200W
	驱动方式	Drive Mode	左右驱动
(盒子大小不同尺寸可能会有变, 重量也会跟着变, 具体以实物为准	效率	Efficiency	15-20次/分
		(盒子大小不同尺寸可能	能会 <mark>有变,重量也</mark> 会跟着变,具体以实物为准

RIDERS Star Group Ltd.
Sourcing, Import, Installation.



主要技术参数/Main Technical Standards:

		W. 1995	
型	号	Model	DF-180-A(定制款)
电	源	Power Supply	220V/50-60HZ
产	量	Yield	500-600盒/小时(可调)
重	量	Weight	约55KG
功	能	Function	自动封口
尺	寸	size	450x500x500MM

(盒子大小不同尺寸可能会有变,重量也会跟着变,具体以实物为准)



主要技术参数/Main Technical Standards:

型	号	Model	DF-170-A(定制款)
电	源	Power Supply	220V/50-60HZ
产	量	Yield	400-500盒/小时
重	量	Weight	约35KG
功	能	Function	手压封口/自动卷膜/自动对标
尺	寸	size	350x400x550MM

(盒子大小不同尺寸可能会有变,重量也会跟着变,具体以实物为准)

RIDERS GROUP





主要技术参数/Main Technical Standards:

型	号	Model	DF-190-A(定制款)
电	源	Power Supply	220V/50-60HZ
产	量	Yield	500-600盒/小时
重	量	Weight	约60KG
功	能	Function	自动封口/自动卷膜/自动对标
尺	寸	size	350x500x650MM

(盒子大小不同尺寸可能会有变,重量也会跟着变,具体以实物为准)



主要技术参数/Main Technical Standards:

型	号	Model	150片膜封口机
材	质	Texture Of Material	不锈钢机架
输	出	Output	400/小时
模具	尺寸	Die Size	定做
温	度	Temperature	0-300
尺	寸	Size	350*450*500
重	量	Weight	20KG
功	能	Function	手压封口

(盒子大小不同尺寸可能会有变,重量也会跟着变,具体以实物为准)





主要技术参数/Main Technical Standards:

型	号	Model	DF-520-A(定制款)
电	源	Power Supply	220V/50-60HZ
产	量	Yield	400-500盒/小时
重	量	Weight	约80-100KG
功	能	Function	自动封口/自动卷膜/自动对标/打码
尺	寸	size	1200x800x600MM

(盒子大小不同尺寸可能会有变,重量也会跟着变,具体以实物为准)



型	号	Model	DF-520-B(定制款)
ŧ	源	Power Supply	220V/50-60HZ
产	量	Yield	600-900盒/小时
重	量	Weight	约100-150KG
功	能	Function	自动封口/自动卷膜/自动对标/自动打码
尺	寸	size	1300x850x700MM

(盒子大小不同尺寸可能会有变,重量也会跟着变,具体以实物为准)





主要技术参数/Main Technical Standards:

32		Model	DF-170-1
电	源	Power Supply	220V/50-60HZ
产	量	Yield	400-500盒/小时
重	量	Weight	约35KG
功	能	Function	手压封口/自动卷膜/自动对标
尺	寸	size	350x400x550MM

(盒子大小不同尺寸可能会有变,重量也会跟着变,具体以实物为准)

RIDERS GROUP

17 鼎飞机械